

CS30
SERIES

24.5 HP

SUB-COMPACT TRACTORS



Ride in Comfort, Work with Power and Ease





CS30 SERIES

THE FIRST SUB-COMPACT TRACTOR WITH A FACTORY-INSTALLED CLIMATE-CONTROLLED CAB!

Revolutionize your land management experience with the industry's first sub-compact tractor to feature a fully equipped, 4-season comfort, factory-installed cab. This game-changing tractor sets a new standard for comfort, convenience, and productivity, boasting the highest torque in its class. With its powerful performance, you'll be able to tackle even the toughest tasks with ease. Say goodbye to the discomfort and distractions of working in the elements and hello to a more efficient and enjoyable experience working the land.




WE DIG DIRT

- Premium Factory Installed Cab
 - Heat and Air Conditioning
 - KIOTI 1.2 L / 3 Cylinder Diesel Engine
 - KIOTI Connect Capable
 - Hydrostatic Transmission
 - Mid and Rear PTO
 - Digital Instrument Panel
 - Improved Fuel Efficiency
 - Improved Lever Layout
- 

CS30 SERIES

EXPERIENCE UNPARALLELED COMFORT, MAXIMUM PERFORMANCE AND UNMATCHED EFFICIENCY

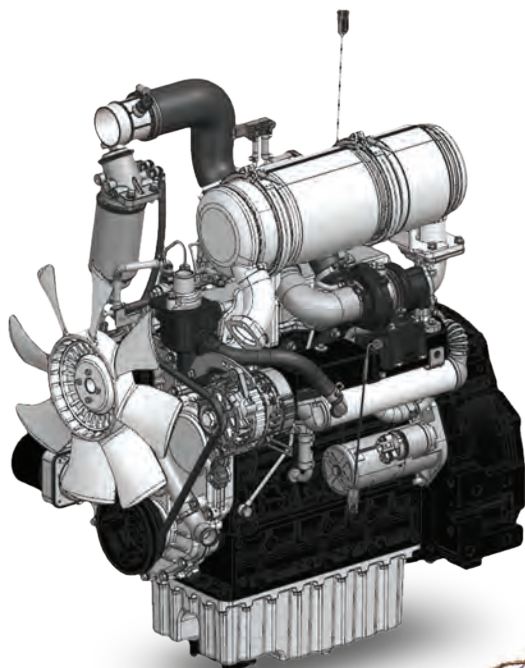

Fuel Efficient Diesel Engine

The KIOTI 1.2L 3CYL water-cooled diesel engine delivers 24.5 horsepower and exceptional torque, the highest in its class, while minimizing fuel consumption. With a 22% increase in displacement over previous KIOTI models, it ensures sufficient power and torque for any-sized chore or task.

Proven Quality and Performance

KIOTI engines are known for exceptional performance and fuel efficiency. Backed by over 65 years of innovation, they meet rigorous global standards like EPA, CARB, and EEC certifications. Built for reliability and durability, these engines are a trusted choice for a wide range of demanding applications.



Mid and Rear PTO

Operate the rear and mid PTO's independently or simultaneously reducing downtime to change implements ensuring uninterrupted productivity.



Factory Installed Cab

Enjoy unmatched comfort with a factory-installed, climate-controlled cab featuring heat and ac, premium suspension seat, wide operator station, increased storage and reduced noise and vibration.



Improved Lever Layout and Operability

Enjoy improved control and comfort with an ergonomic design for a natural fit and intuitive operation. Our levers ensure precision and confidence, making your work more comfortable and efficient.



Four-Wheel Drive

Four-wheel drive comes standard, providing enhanced traction and stability, and is easily engaged with a simple push-pull lever, ensuring quick and effortless control over the most rugged terrain.



Twin HST Pedals

Twin HST pedals enable easy forward and reverse movement, with smooth acceleration and deceleration. The dual pedals simplify operation, reducing operator fatigue during long hours of work and repetitive tasks.



Illuminated Digital Instrument Panel

The instrument panel provides critical information at a glance, including PTO engagement, vehicle information, fuel level, notifications, and alerts.



Projection Head and Working Lamps

The LED projection head and working lamps pierce the darkness, casting a wide, clear beam that illuminates your field for safe, precise maneuvering even after sunset.



Power with Tilt Steering

Minimizes the effort required to make tight, repetitive turns. The steering wheel tilts with the simple push of a lever, allowing easy adjustment to fit the operator's needs.



Integrated Multimedia Display (Optional)

Elevate your entertainment with our multimedia display, boasting vivid audio/video and superior sound quality. Pair it with a separately purchased high-quality camera for an immersive experience, enhanced by a seamless AV multimedia deck for top-tier performance and connectivity.



Rear View Camera (Optional)

Revolutionize your workday with the rear view camera, eliminating blind spots and enhancing convenience and precision. With a clear, real-time view, operators can confidently perform three-point maneuvers and reverse with ease.



C530 SERIES BUILT WITH COMFORT IN MIND



Cruise Control

Maintain consistent speeds effortlessly with the integrated cruise control. Perfect for tasks like mowing or spraying, simply set your desired speed and let the tractor do the work, reducing fatigue and ensuring a uniform finish.



HVAC Climate Control

Our advanced HVAC system provides optimized heating and cooling, ensuring a comfortable cabin year-round. Enjoy reliable cooling in summer and warmth in winter. Engineered for efficiency and durability, this system enhances operator comfort and productivity.



Deluxe Suspension Seat

The Deluxe Suspension Seat is engineered to deliver comfort for the operator by absorbing shocks and vibrations, minimizing the impact of rough surfaces and ensuring a smooth ride.



Swivel Seat for Backhoe Operation (Optional)

The swivel feature allows the operator to rotate the seat towards the rear of the tractor, facilitating in-cab operation of the backhoe when installed.



Drive-Over Deck

Offers a seamless and efficient mounting experience, allowing you to easily mount the mid mower by simply driving over it. This innovative design streamlines setup, eliminating side insertion and getting you to work faster with minimal effort.



Front and Rear Wipers

Standard front double arm wiper (optional rear single arm wiper) keeps your view crystal clear, battling both rain and dust. Their optimized placement ensures the operator's vantage point stays clean and uncompromised.



Electric / Hydraulic Thumb (Optional)

Designed for ease of use, this feature allows for precise and responsive control of the hydraulic thumb directly through the joystick, allowing you to accomplish more in less time.



Rear Differential Lock

The lever easily engages the differential, ensuring optimal traction in slippery conditions like uneven or muddy terrain.





INCREASED PRODUCTIVITY

Improved performance, work faster & more efficiently



IMPROVED EFFICIENCY

Controls within easy reach for convenience



ENHANCED CABIN COMFORT

Work all day in comfort



Enhanced Warranty

Benefit from peace of mind, knowing that your equipment is protected by Kioti's standard 4 year, unlimited hour warranty



CS30
SERIES





KIOTI Connect Capable

KIOTI Connect is an intuitive app that provides real-time insights, maintenance tracking, and remote diagnostics, keeping you connected to your machine like never before.



Rubber Floor Mats

Rubber floor mats are designed to protect the base of your tractor from dents and scratches, ensuring long-lasting durability. Additionally, these mats are easy to clean, allowing for quick removal of dirt and debris.



Standard Quick Attach

The Quick Attach feature makes switching tasks easy, with minimal effort and maximum convenience. Left and right levers allow you to effortlessly install and remove attachments from the loader quickly & efficiently.



In-Cab Loader Attachment Access

Enjoy the convenience and safety of managing the loader quick release from the comfort of the cab, eliminating the need to repeatedly get on and off the tractor.



USB Charging Port with AUX / Stereo

Stay connected and entertained with the built-in USB charging port and AUX/stereo system. Connect your phone to the cabin speakers via AUX, or upgrade to optional Bluetooth stereo or audio den for enhanced music and streaming capabilities.



Class-Leading Torque

Boasting an impressive 51.63 lb.-ft of torque, it is the highest-torque tractor in its class. This exceptional power output is provided by its robust 1.2L KIOTI diesel engine, which produces 24.5 horsepower. Tackle tasks with ease, from mowing and tilling to landscaping and hauling.



Self-Leveling Loader (Optional)

Maintains the desired bucket angle when lifting and lowering, preventing the need to manually position the bucket throughout the lift/lower cycle to keep your material in the bucket. This can increase productivity while adding a layer of safety to your worksite.



Backhoe Compatible Cabin

Allows for smooth transitions between driving and digging, with a removable rear glass and back panel, quickly transition from tractor to backhoe operations for instant access to controls. This design minimizes downtime and maximizes productivity.



ATTACHMENTS

FRONT END LOADER SPECIFICATIONS

MODEL		SL2530 (Non-Self Leveling)	SL2530 (Self Leveling*)
Maximum Lift Height (to Pivot Point)	in. (mm)	70.9 (1,800)	71.1 (1,807)
Clearance w/Bucket Dumped (@ 45°)	in. (mm)	50.4 (1,280.2)	51.6 (1,310)
Reach at Maximum Height	in. (mm)	28.3 (718)	27.4 (695)
Reach w/Bucket on Ground	in. (mm)	54.2 (1,377)	54.4 (1,382)
Maximum Rollback Angle	deg.	27	42
Digging Depth Below Grade	in. (mm)	8.1 (205)	7.5 (190)
Overall Height (in Carry Position)	in. (mm)	43.4 (875)	37.4 (905)
Depth of Bucket (to Back of Inner Shell)	in. (mm)	17 (432)	17 (432)
Height of Bucket	in. (mm)	18.6 (473)	18.6 (473)
Length of Bucket (to Pivot Pin)	in. (mm)	22 (559)	22 (559)
Lift Capacity to Full Height (at Pivot Pins)	lbs. (kg)	871 (395)	913 (414)
Breakout Force (at Pivot Pins)	lbs. (kg)	1,299 (589)	1,281 (581)
Relief Setting (Loader Control Valve)	psi (Kgf)	1,849 ~ 1,920 (130 ~ 135)	1,849 ~ 1,920 (130 ~ 135)
Bucket Size (QA)	in. (mm)	48 (1219.2)	48 (1219.2)
Bucket Capacity (Heaped)	ft. ³ (m ³)	6.70 (0.19)	6.70 (0.19)


* Mechanical self leveling (optional).

BACKHOE SPECIFICATIONS

MODEL		SB2530
Bucket Sizes	in. (mm)	8 (203.2) 12 (304.8) 16 (406.4)
Digging Depth (Two Foot Flat Bottom)	in. (mm)	72.4 (1,840)
Reach from Center Line of Swing Pivot	in. (mm)	105 (2,668)
Loading Height (Bucket at 60°)	in. (mm)	59.4 (1,510)
Maximum Leveling Angle	deg.	8
Swing Arc	deg.	150
Transport Height (Maximum)	in. (mm)	68.5 (1,739)
Transport Overhang	in. (mm)	41.3 (1,050)
Bucket Rotation	deg.	165
Stabilizer Spread (Down Position)	in. (mm)	78 (1,981)
Stabilizer Spread (Up Position)	in. (mm)	54 (1,372)
Angle of Departure	deg.	17
Shipping Weight (Without Bucket)	lbs. (Kgf)	613 (278)
Bucket Digging Force	lbs. (Kgf)	2,105 (955)
Dipperstick Digging Force	lbs. (Kgf)	1,184 (537)
Operating Pressure	psi (bar)	1,886 (130)

MID-MOUNT MOWER SPECIFICATIONS

MODEL		SM2554	SM2560
Mounting Method		Suspended Linkage	Suspended Linkage
Adjustment of Cutting Height		7 Step (0.5" / Step)	7 Step (0.5" / Step)
Cutting Width	in. (mm)	54 (1,368)	60 (1,524)
Cutting Height	in. (mm)	1 - 4 (25.4 - 101.6)	1 - 4 (25.4 - 101.6)
Weight	lbs. (kg)	249 (113)	254.0 (115.2)
Deck Thickness	in. (mm)	0.1 (3.2)	0.1 (3.2)
Blade Spindle Speed	rpm	2,805	2,805
Blade Tip Velocity	m/s	69.2	75.2
Blade Length	in. (mm)	18.5 (470)	20.4 (517)
Number of Blades		3	3
Total Length	in. (mm)	35.7 (908)	37.9 (962)
Total Width	in. (mm)	69.3 (1,760)	73.4 (1,865)
Total Height	in. (mm)	10.5 (267)	10.7 (273)
Auto Connector Link KIT	in. (mm)	N/A	Opt
Auto Joint KIT	in. (mm)	N/A	Opt

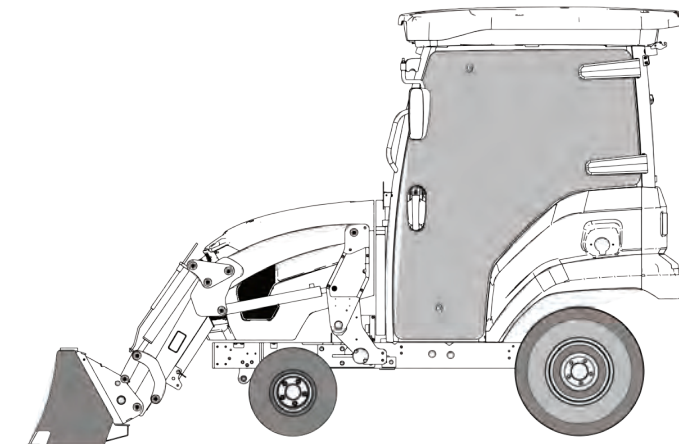

* Specifications and design are subject to change without notice.

SPECIFICATIONS

MODEL	CS2530C
ENGINE	
Model	KIOTI 3L123
Type	KIOTI 3 Cylinder, Water-Cooled Diesel
Engine Gross	24.50 HP (18.27 kW)
PTO	19.30 HP (14.32 kW)
Displacement	75.24 cu.in. (1,233 cc)
Rated Revolution	3,000 rpm
Fuel Tank Capacity	6.6 gal. (25.5 ℓ)
DRIVE TRAIN	
Transmission	2 Range Hydrostatic
Speeds	Infinite
Differential Lock	Rear Standard
Brake	Wet Disc
PTO	Electric / Hydraulic
Rear PTO	540
4WD Type	Mechanical
HYDRAULIC SYSTEM	
Pump	Open Center
Pump Capacity (max flow rate)	Steering 2.03 GPM (7.7 lpm) / Imp. 4.9 GPM (18.7 lpm)
3-Point Hitch	Category I
Maximum Lifting Capacity*	700 lbs. (317.52 kg)
Hydraulic Lift Control System	Mechanical
No. of Standard Remote Valves (Rear)	1 (Optional)
Tire Size	
Front AG.	18 x 8.5 -10
Rear AG.	26 x 12 - 12
TRAVEL SPEED	
Forward	0 ~ 8.99 mph (0 ~ 14.47 kph)
Reverse	0 ~ 6.15 mph (0 ~ 9.90 kph)
DIMENSIONS	
Overall Length w/o front weight & w/ 3-pt hitch	102.90 in.(2,613.70 mm)
Overall Width (min. tread)	48.30 in. (1,226.82 mm)
Overall Height	82.60 in.(2,098.04 mm)
Wheelbase	55.10 in.(1,399.54 mm)

*@ 24" aft of hitch.

NOTE: Specifications and design are subject to change without notice.

STANDARD EQUIPMENT

- Power Steering
- Tilt Steering
- Rear Differential Lock
- Rear PTO
- Mid PTO
- Wet Multi Disc Brakes
- HVAC
- Joystick Valve
- 4 Wheel Drive
- Cruise Control
- PTO Shield
- SMV Sign
- Parking Brake
- Headlights
- Warning / Signal Lamps
- 12V Power Outlet & USB Socket
- Suspension Seat with Arm Rests
- KIOTI Connect Capable
- Horn
- Fixed Drawbar
- Cup Holder
- Side View Mirrors
- Rear View Mirror
- Front Wiper
- Sun Visor
- Front Work Lights
- Rear Window Defrost
- Rear Wheel Weights

OPTIONAL EQUIPMENT

- 7 Pin Socket
- Beacon Light
- Bluetooth Radio
- LCD Monitor
- 3rd Function
- Front Grille Guard
- Rear Window Wiper
- Rear Work Lights
- Hydraulic Filter Guard
- Towing Hook
- Back Up Camera
- Rear Hydraulic Valve
- Front Weight



Daedong - USA, Inc.
KIOTI Tractor Division
 6300 KIOTI Drive, Wendell, NC 27591 USA
Toll free 877-GO-KIOTI Fax 919-374-5001
Web www.KIOTI.com

Dealer Imprint Area

LIT-CS30C-01



CS Series

22 - 25 HP



CS10 SERIES

Big things come in small packages.

Compact and agile to maneuver where you need to go. Powerful and versatile, so it can handle the big stuff. You'll wonder how you ever lived without a KIOTI® CS.

Mid & Rear PTO
HST Transmission
Three-point Hitch

Power Steering
Twin HST Pedals
Easy Operation



Mid PTO

The standard mid PTO (2,200 rpm) provides the ability to operate implements such as a mid-mount mower or snowblower.

12V Power Outlet

The standard 12 volt power outlet is available for accessories.

Distinctive Hood Design

The streamlined hood design improves the visibility for the operator.
A vertical opening hood allows for easy access to the air filter, fluid service and inspection locations, fuse box and electrical components.

60°

Illuminated Dashboard

The dashboard illuminates when the engine is started. The digital gauge package includes tachometer, fuel and temperature gauges along with a low fuel warning lamp.

Power Steering

Power steering is standard and minimizes the effort required to make tight and repetitive turns even with a full loader bucket.

Twin HST Pedals

Twin HST pedals allows easy and quick forward and reverse with smooth engagement, acceleration and deceleration. Dual pedals provide easier use which reduces operator fatigue during long hours of work and when doing repetitive tasks.

EASY TO OPERATE, EASY TO MAINTAIN, HARD TO BEAT



Left Hand Lever Controls

The HST with selectable HI-LO range lever allows the tractor to overcome a wide range of load tasks. The rear PTO and mid PTO can be controlled separately or together with a simple in-line shifting lever. The height adjustment lever allows the operator to control the mid-mount mower grass cutting height easily.



Right Hand Lever Controls

The wet multi disk PTO clutch has a simple mechanical engaging lever. The 3 point position control easily operates the 3 point hitch by simply pushing or pulling the lever.



Foldable ROPS

The standard fold-down roll bar makes it quick and easy to maneuver in low clearance areas.



Headlights

Best in class, 55W lamps provide the operator optimal visibility.



Four Wheel Drive

Engaged by a single lever, 4WD is standard on the CS Series tractors.



Ergonomic Operator Station

The ergonomically designed work station places operator controls within easy reach. Equipped with a seat belt and operator presence switch, the CS Series focuses on operator safety.



Rear PTO and 3-Point Hitch

The rear PTO and high capacity three point hitch can accommodate a variety of implements. The bent lower link assists with easy implement installation.



KIOTI Diesel Engine

Fully designed and created by KIOTI, the 21 hp (15.6 kW) - 24.5 hp (18.3 kW) premium, water-cooled diesel engines have large power output, yet low fuel consumption.

CS20 SERIES

Small in stature, massive in power.

Ergonomically designed to keep you working in comfort until the dirty work is done. Powerful, but compact for your jobs of all sizes.

KIOTI Diesel Engine

Tilt Steering Wheel

Standard Joystick Valve

Ergonomic Operator System

Hydraulic PTO

All Steel Platform



Distinctive Hood Design

The streamlined hood design improves the visibility for the operator. A vertical opening hood allows for easy access to the air filter, fluid service and inspection locations, fuse box and electrical components.

60°

Illuminated Dashboard

The dashboard illuminates when the engine is started. The digital gauge package includes tachometer, fuel and temperature gauges along with a low fuel warning lamp.

Power Steering with Tilt Wheel

Power steering makes it easy to take tight, repetitive turns. The standard tilt steering wheel ensures all operators can reach and turn the wheel comfortably.

Twin HST Pedals

Twin HST pedals allows easy and quick forward and reverse with smooth engagement, acceleration and deceleration. Dual pedals provide easier use which reduces operator fatigue during long hours of work and when doing repetitive tasks.

BUILT FOR COMFORT, USER FRIENDLY, HARD ON WORK



Redesigned Operator Station and All Steel Platform

With an all-steel platform and rubber deck mat, the redesigned CS Series operator station allows the operator to easily reach all controls, making it both comfortable and user-friendly.



Quick Attach and Detach Loader

New “pinless” design enables the operator to quickly and efficiently remove or install the loader in minutes without having to remove or install loader pins to secure it to the tractor. Additional quick attach system on the front makes switching attachments a breeze.



12V/USB Port

The standard 12 volt power outlet with added USB port is available for accessories.



Hydraulic PTO

Hydraulic PTO clutch offers great durability and ease of use. Simply rotate the knob to engage or disengage the PTO.



Standard Cruise Control

Cruise control comes standard with the KIOTI CS20, allowing operators to set and maintain desired speed.



Mid PTO

The standard mid PTO (2,200 rpm) provides the ability to attach and operate implements such as the KIOTI mid-mount mower or snowblower.



Standard Joystick Valve

The CS 20 joystick valve gives operators convenient, comfortable and precise control over the loader to lift, lower and carry loads anywhere you desire regardless of experience or skill level.



KIOTI Diesel Engine

Fully designed and created by KIOTI, the 21 hp (15.6 kW) - 24.5 hp (18.3 kW) premium, water-cooled diesel engines have large power output, yet low fuel consumption.



KIOTI SUB-COMPACT TRACTOR



Mid-Mount Mower

MODEL	SM2454	SM2460
Compatible Models	CS10 / CS20 Series	CS10 / CS20 Series
Discharge Type	Side Discharge	Side Discharge
Cutting Width	54 in. (1,364 mm)	60 in. (1,524 mm)
Cutting Height	.8~3.8 in. (20.3~96.5 mm)	.8~3.8 in. (20.3~96.5 mm)
Transport Height	6 in. (152.4 mm)	6 in. (152.4 mm)
Gear Type	Spiral Bevel	Spiral Bevel
Number of Blades	3	3
Blade Spindle Speed	2,888 rpm	2,888 rpm
Blade Tip Velocity	71.1 m/s	78.2 m/s
Blade Length	18.5 in. (470 mm)	20.4 in. (517 mm)
Deck Thickness	0.13 in. (3.2 mm)	0.13 in. (3.2 mm)
Total Width	69.3 in. (1,760 mm)	75 in. (1,905 mm)
Total Length	35.7 in. (908 mm)	37.9 in. (962 mm)
Total Height	10.5 in. (267 mm)	10.5 in. (267 mm)
Drive Type	U-Joint and V-Belt	U-Joint and V-Belt
Lifting Type	3 Point Hitch Links	3 Point Hitch Links
Loader / Backhoe Compatibility	Yes	Yes



Front End Loader

MODEL	SL2410	SL2420
Compatible Models	CS2210 / 2410 / 2510	CS2220 / 2520
Maximum Lift Height (to Pivot Pin)	70.9 in. (1,801 mm)	73.7 in. (1,872 mm)
Clearance w/ Bucket Level	67.6 in. (1,717 mm)	68.1 in. (1,730 mm)
Clearance w/ Bucket Dumped	54.4 in. (1,382 mm)	54.8 in. (1,392 mm)
Reach at Maximum Height	30.7 in. (780 mm)	29.7 in. (755 mm)
Maximum Dump Angle	45°	38°
Reach w/ Bucket on Ground	53.1 in. (1,348 mm)	52.8 in. (1,342 mm)
Maximum Rollback Angle	27°	27°
Digging Depth Below Grade	4.4 in. (111 mm)	5.1 in. (130 mm)
Overall Height (in Carry Position)	41.5 in. (1,055 mm)	34.1 in. (867 mm)
Depth of Bucket (to back of inner shell)	17.5 in. (444 mm)	18 in. (457.3 mm)
Height of Bucket	19.3 in. (491 mm)	19 in. (484 mm)
Length of Bucket (to pivot pin)	21.5 in. (547 mm)	22.4" (569.4 mm)
Lift Capacity to Full Height (at Pivot Pins)	683.4 lbs. (310 kg)	1062.3 lbs. (482 kg)
Breakout Force (at Pivot Pins)	1,435.2 lbs. (651 kg)	1,329 lbs. (603 kg)
Bucket Rollback Force (at Ground Line)	846.6 lbs. (384 kg)	904 lbs. (410 kg)
Relief Valve Setting (Loader Control Valve)	1,900 psi (133.6 kg/cm2)	1,900 psi (133.6 kg/cm2)
Rated Flow (Tractor System)	3.5 gpm (13.4 L/min)	4.9 gpm (18.7 L/min)
Bucket Size (QA)	48 in.	48 in.
Bucket Capacity (Heaped)	6.7 cu. ft.	6.7 cu. ft.
Approximate Weight (With Bucket)	498 lbs. (226 kg)	573 lbs. (260 kg)

Backhoe

MODEL	SB2410L	SB2420
Compatible Models	CS2210 / 2410 / 2510	CS2220 / 2520
Bucket Sizes	8 in. 12 in. 16 in.	8 in. 12 in. 16 in. 24 in.
Digging Depth (Two Foot Flat Bottom)	72.8 in. (1,850 mm)	72.8 in. (1,850 mm)
Reach from Center Line of Swing Pivot	105.7 in. (2,684 mm)	105.7 in. (2,684 mm)
Loading Height (Bucket at 60°)	59.1 in. (1,500 mm)	59.1 in. (1,500 mm)
Maximum Leveling Angle	8°	8°
Swing Arc	150°	150°
Transport Height (Maxim um)	68.1 in. (1,729 mm)	68.1 in. (1,729 mm)
Transport Overhang	41.3 in. (1,050 mm)	41.3 in. (1,050 mm)
Bucket Rotation	165°	165°
Stabilizer Spread (Down Position)	78 in. (1,981 mm)	78 in. (1,981 mm)
Stabilizer Spread (Up Position)	54 in. (1,372 mm)	54 in. (1,372 mm)
Angle of Departure	14.5°	20°
Shipping Weight (Without Bucket)	635 lbs. (288 Kg)	635 lbs. (288 Kg)
Bucket Digging Force	2,105 lbs. (955 Kg)	2,105 lbs. (955 Kg)
Dipperstick Digging Force	1,183 lbs. (537 Kg)	1,183 lbs. (537 Kg)
Operating Pressure	1,885 psi. (130 bar)	1,885 psi. (130 bar)

* Specifications and design are subject to change without notice.





ISO 9001
NO.954596



ISO 14001
NO.771475



OHSAS 18001
NO:K033008

SPECIFICATIONS

MODEL		CS2210	CS2220	CS2510	CS2520
ENGINE					
Model		3C100LWH-U3	3C100LWH-U3	3C100LFH-U2	3C100LFH-U2
Type		Liquid Cooled 3 Cyl.,Diesel			
Engine Gross	hp (kW)	21 (15.6)	21 (15.6)	24.5 (18.3)	24.5 (18.3)
PTO @ Rated PTO rpm	hp (kW)	16.3(12.2)	16.3(12.2)	18.5(13.9)	18.5(13.9)
Displacement	cu. in. (cc)	61.5(1,007)	61.5(1,007)	61.5(1,007)	61.5(1,007)
Rated Revolution	rpm	3,200	3,200	3,200	3,200
Fuel Tank Capacity	US. gal. (ℓ)	6.7 (25.5)			
DRIVE TRAIN					
Transmission		HST			
Speeds		Infinite, 2 range			
Differential Lock		Rear Standard			
Brake		Wet Multi Disc			
PTO Type		Independent			
Rear PTO (Standard)	rpm	540			
Mid PTO (Standard)	rpm	2,200			
4WD Type		Mechanical Engagement			
HYDRAULIC SYSTEM					
Pump		Gear			
Pump Capacity (Max. Flow Rate)	gpm (L/min)	6.5 (24.6)	6.97 (26.4)	6.5 (24.6)	6.97 (26.4)
3-Point Hitch		Category I			
Maximum Lifting Capacity (24" aft. of hitch)	lb. (kg)	700 (318)			
Hydraulic Lift Control System		Position			
Steering		Power Steering			
TIRE SIZE					
Front AG. (Turf, Industrial)		18×8.5-10 (18×8.5-10)			
Rear AG. (Turf, Industrial)		26×12.00-12 (26×12.00-12)			
TRAVELING SPEEDS					
Forward	mph (km/h)	0~10.31(0~16.6)	0~9.57 (0~15.4)	0~10.31(0~16.6)	0~9.57 (0~15.4)
Reverse	mph (km/h)	0~6.96 (0~11.2)	0~6.6 (0~10.6)	0~6.96 (0~11.2)	0~6.6 (0~10.6)
DIMENSIONS					
Overall Length (Includes 3-pt Hitch)		in. (mm)	99.3 (2,523)		
Overall Width (Minimum Tread)		in. (mm)	46.7 (1,185)	45.9 (1,168)	46.7 (1,185)
Overall Height (From Top of ROPS)		in. (mm)	88 (2,226)		
Wheelbase		in. (mm)	55.1 (1,400)		
Min. Ground Clearance		in. (mm)	6.4 (162)		
Tread	Front (AG.)	in. (mm)	45.3 (1,150)	45.9 (1,168)	45.3 (1,150)
	Rear (AG.)	in. (mm)	46.7 (1,185)	46 (1,168)	46.7 (1,185)
Min. Turning Radius (With Brake)		ft. (m)	8.2 (2.54)		
Weight with AG. Tires		lb. (kg)	1,485 (675)	1,554 (705)	1,485 (675)

* NOTE : Specifications and design are subject to change without notice.

STANDARD EQUIPMENT

- Rear PTO
- Mid PTO
- Joystick Valve (CS20 Series)
- Cruise Control (CS20 Series)
- 12V/USB Port (CS20 Series)
- 12V Power Socket (CS10 Series)
- Tilt Wheel (CS20 Series)
- Grill Guard¹
- Power Steering
- Parking Brake
- PTO Shield
- Headlights
- Warning / Signal Lamps
- Cup Holder
- Horn
- SMV Sign

¹When loader is purchased with tractor.

OPTIONAL EQUIPMENT

- Front Hydraulic Valve (CS10 Series)
- Rear Hydraulic Valve
- Rear Working Lights
- Cruise Control (CS10 Series)
- Front Weight (60 lbs)
- Side View Mirror
- Canopy Kit
- Grill Guard
- Armrest Kit
- Front Towing Hook
- Hydraulic Filter Guard
- Rear Wheel Weight
- Field Option Cab

ATTACHMENTS

- Front End Loader
- Mid-Mount Mower
- Backhoe
- Snow Blower
- Contact your local KIOTI dealer for available implements and attachments.



KIOTI Tractor Division

DAEDONG - USA, INC.

6300 KIOTI Drive, Wendell, NC 27591 USA

Toll free 877-GO-KIOTI • Fax 919-374-5001

Web www.KIOTI.com



Dealer Imprint Area

LIT-CS-ALL3