



CS10 / CS20 SERIES AGILE, FUEL-EFFICIENT TRACTORS DELIVERING POWERFUL, VERSATILE PERFORMANCE FOR ALL YOUR NEEDS

The KIOTI CS10 and CS20 Series sub-compact tractors are engineered for big results, delivering reliable power and impressive fuel efficiency thanks to their 3-cylinder diesel engines. With a smooth, hydrostatic transmission and agile design, these tractors offer outstanding maneuverability and easy operation, making them ideal for mowing, landscaping, and hobby farming—even in tight spaces. The ergonomic layout ensures comfort during long hours, while robust construction promises years of dependable service with minimal maintenance. Whether you're a homeowner or hobby farmer, the CS10 and CS20 Series tractors deliver exceptional value and consistent performance in a user-friendly package.




- KIOTI 3-Cylinder In-Line Vertical, Water-Cooled Diesel Engine
- 21-24.5 HP
- Rear and Mid PTO
- Hydrostatic Transmission
- Twin HST Pedals
- 700 Pound 3-Point Lift Capacity
- Four-Wheel Drive
- Power Steering
- Tilt Steering Wheel (CS20 Series)
- Cruise Control (CS20 Series)
- Single Lever Joystick (CS20 Series)

CS10 / CS20 SERIES BUILT TO PERFORM WITH FEATURES THAT GET IT DONE

Fuel Efficient Diesel Engine

The reliable, efficient 3-cylinder in-line vertical, water-cooled diesel engine delivers impressive performance and smooth operation, offering excellent power for a wide range of hobby farming and landscaping tasks.



KIOTI engines are known for exceptional performance and fuel efficiency. Backed by over 65 years of innovation, they meet rigorous global standards like EPA, CARB, and EEC certifications. Built for reliability and durability, these engines are a trusted choice for a wide range of demanding applications.



Hydrostatic Transmission

Powerful, reliable hydrostatic transmissions deliver efficiency and control. The easy-to-use twin pedals and 2-range transmission make operation smooth and safe.



Rear & Mid PTO

Operate the rear and mid PTOs independently or simultaneously, reducing downtime to change implements and ensuring uninterrupted productivity.




Twin HST Pedals

Enables easy forward and reverse movement, with smooth acceleration and deceleration. The twin pedals simplify operation, reducing operator fatigue during long hours of work and repetitive tasks.



Independent PTO

Designed for versatility and operator convenience, the independent PTO allows you to power your implements independently of your tractor's ground speed or transmission.

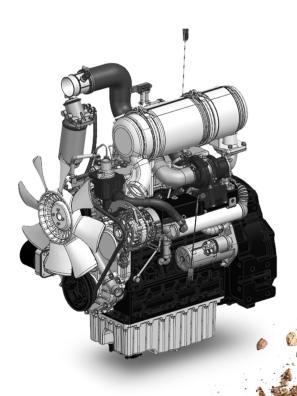





Single Lever Joystick (CS20 Series)

The joystick provides single-lever control for the loader functions. When released, it returns to neutral, stopping the loader in its current position. A float position allows the bucket to float freely over the ground surface.



3-Point Hitch

Features a robust Category I 3-point hitch with substantial lift capacity and precise control. The position control lever allows easy operation.



Quick Attach & Detach Loader (CS20 Series)

The pinless design allows the operator to quickly remove or install the loader in minutes without needing to handle pins. The additional quick-attach system on the front makes switching attachments easy.



Four-Wheel Drive

Four-wheel drive provides increased traction and enhanced brake performance for seamless on- and off-road transitions.



Impressive Lift Capacity

With a loader lift capacity of up to 1,062 lb. (482 kg.), the CS10 & CS20 deliver impressive strength for their class-ideal for reliable performance in landscaping, tilling, and material handling, all without stepping up to a larger machine.



Cruise Control (CS20 Series)

Maintain consistent speeds effortlessly with the integrated cruise control. Perfect for tasks like mowing or spraying, simply set your desired speed and let the tractor do the work, reducing fatigue and ensuring a uniform finish.



CS10 / CS20 SERIES BUILT FOR THE LAND - READY FOR ANYTHING



Efficient Fuel Capacity

The 6.7-gallon (25.5-liter) fuel tank delivers excellent fuel efficiency, allowing you to power through extended hours of work with fewer refueling stops.



Power Steering

Minimizes the effort needed to make tight, repetitive turns, enhancing driver comfort and control.



Tilt Steering Wheel (CS20 Series)

The tilt steering wheel is designed for maximum comfort, allowing operators to easily adjust to their ideal driving position for a smooth and relaxed experience, no matter the duration of the task.



Illuminated Dashboard

The dashboard illuminates when the engine starts. The digital gauge package includes a tachometer, fuel and temperature gauges, and a low fuel warning lamp.



KIOTI Connect Capable

Compatible with the KIOTI Connect app to track and manage your equipment's maintenance. You can leverage Alpowered features to get insights on agriculture and tractors.



Open Operator Station

With a sturdy platform and rubber floormat, the operator station offers easy access to controls, convenient entry and exit, and protection from wear, spills, and scratches for lasting durability.



Streamlined Hood Design

The streamlined hood design improves visibility for the operator. A vertically opening hood allows easy access to the air filter, fluid service and inspection points, fuse box, and electrical components.



Foldable ROPS

The standard fold-down roll bar makes it quick and easy to maneuver in low clearance areas.



Ergonomic Operator Station

The ergonomically designed workstation ensures all operator controls are easily within reach. Featuring a seat belt and operator presence switch, the CS Series prioritizes safety for every operator.



Best-in-Class Headlights

Experience superior illumination with 55W headlight lamps, engineered to provide exceptional visibility for the operator, ensuring maximum safety and precision, even in low-light conditions.



12V Power Socket / USB Port (CS20 Series)

Power essential accessories or tools on the go with the built-in 12V power socket and convenient USB charging port. The CS10 Series includes only the power socket.



Fast Traveling Speeds

Tackle tasks with ease at speeds up to 10 mph (16 km/h)-ideal for covering ground quickly during property maintenance, yard work, or light agricultural jobs.






ATTACHMENTS

FRONT END LOADER

KIOTI SL2410 and SL2420 front-end loaders deliver impressive lift capacity, quick-attach convenience, and precise joystick control for CS10 and CS20 Series tractors.

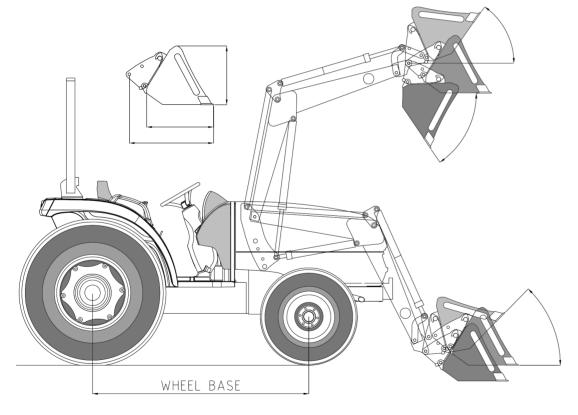

SPECIFICATIONS

MODEL		SL2410	SL2420
Compatible Models		CS2210 / 2510	CS2220 / 2520
Maximum Lift Height (to Pivot Pin)	in. (mm)	70.9 (1,800.9)	73.7 (1,872.0)
Clearance w/ Bucket Level	in. (mm)	67.6 (1,717.0)	68.1 (1,729.7)
Clearance w/ Bucket Dumped	in. (mm)	54.4 (1,381.8)	54.8 (1,391.9)
Reach at Maximum Height	in. (mm)	30.7 (779.8)	29.7 (754.4)
Maximum Dump Angle	deg.	45	38
Reach w/ Bucket on Ground	in. (mm)	53.1 (1,348.7)	52.8 (1,341.1)
Maximum Rollback Angle	deg.	. 27	
Digging Depth Below Grade	in. (mm)	4.4 (111.8)	5.1 (129.5)
Overall Height (Carry Position)	in. (mm)	41.5 (1,054.1)	34.1 (866.1)
Depth of Bucket (to Back of Inner Shell)	in. (mm)	17.5 (444.5)	18.0 (457.2)
Height of Bucket	in. (mm)	19.3 (490.0)	19.0 (484.0)
Length of Bucket (to Pivot Pin)	in. (mm)	21.5 (546.1)	22.4 (568.9)
Lift Capacity to Full Height	lb. (kg)	683.4 (310.0)	1,062.3 (482.0)
Breakout Force (at Pivot Pins)	lb. (kg)	1,435.2 (651.0)	1,329 (603.0)
Bucket Rollback Force (at Ground Line)	lb. (kg)	846.6 (384.0)	904.0 (410.0)
Relief Valve Setting (Loader Control Valve)	psi (kg/cm2)	1,900.0 (133.6)	
Rated Flow (Tractor System)	gpm (L/min)	3.5 (13.4)	4.9 (18.7)
Bucket Size (QA)	in. (mm)	48.0 (1,219.0)	
Bucket Capacity (Heaped)	cu. ft. (cu. m)	6.7 (0	.2)
Approximate Weight (With Bucket)	lb. (kg)	498.0 (225.9)	573.0 (260.0)

NOTE: specifications and design are subject to change without notice.

ATTACHMENTS

MID-MOUNT MOWER

The KIOTI SM2454 and SM2460 mid-mount mowers offer clean, precise cutting with durable decks, smooth operation, and easy height adjustment.

SPECIFICATIONS

MODEL		SM2454	SM2460	
Compatible Models		CS10/CS	20 Series	
Dischare Type		Side Dis	scharge	
Cutting Width	in. (mm)	53.7 (1,364.0)	60.0 (1,524.0)	
Cutting Height	in. (mm)	.8~3.8 (2)	0.3~96.5)	
Transport Height	in. (mm)	6.0 (152.4)		
Gear Type		Spiral	Bevel	
Number of Blades		3		
Blade Spindle Speed	rpm	2,888		
Blade Tip Velocity	m/s	71.1	78.2	
Blade Length	in. (mm)	18.5 (470.0)	20.4 (517.0)	
Deck Thickness	in. (mm)	0.13 (3.3)		
Total Width	in. (mm)	69.3 (1,760.0)	75.0 (1,905.0)	
Total Length	in. (mm)	35.7 (908.0)	37.9 (962.0)	
Totel Height	in. (mm)	10.5 (267.0)		
Drive Type		U-Joint & V-Belt		
Lifting Type	Lifting Type		3 Point Hitch Links	
Loader/Backhoe Compatibility		Ye	es	

NOTE: specifications and design are subject to change without notice.

BACKHOE

The SB2410L and SB2420 backhoes deliver powerful digging performance with easy attachment, responsive controls, and durable construction for tough jobs.

SPECIFICATIONS

MODEL		SB2410L	SB2420	
Compatible Models		CS2210 / 2510	CS2220 / 2520	
Bucket Sizes	in. (mm)	8.0 (203.0) / 12.0 (305.0) / 16.0 (406.0)	8.0 (203.0) / 12.0(305.0) / 16.0 (406.0 / 24.0 (609.0)	
Digging Depth (Two Foot Flat Bottom)	in. (mm)	7	2.8 (1,850.0)	
Reach from Center Line of Swing Pivot	in. (mm)	10	05.7 (2,684.0)	
Loading Height (Bucket at 60°)	in. (mm)	5	9.1 (1,500.0)	
Maximum Leveling Angle	deg.		8	
Swing Arc	deg.	150		
Transport Height (Maximum)	in. (mm)	68.1 (1,729.0)		
Transport Overhang	in. (mm)	41.3 (1,050.0)		
Bucket Rotation	deg.	165		
Stablilizer Spread (Down Position)	in. (mm)	78.0 (1,981.2)		
Stablizier Spread (Up Position)	in. (mm)	54.0 (1,371.6)		
Angle of Departure	deg.	14.5	20.0	
Shipping Weight (Without Bucket)	lb. (kg)	635.0 (288.0)		
Bucket Digging Force	lb. (kg)	2,105.0 (954.8)		
Dipperstick Digging Force	lb. (kg)	1,183.0 (536.6)		
Operating Pressure	psi (bar)	1,	885.0 (130.0)	
		V)	y vv ty v	

NOTE: specifications and design are subject to change without notice.





MODEL		CS2210H	CS2220H	CS2510H	CS2520H
ENGINE					
Model		3C100	LWH-U3	3C100LFH-U2	
Туре				, Water-Cooled Turbo Diesel Engine	
Engine Gross	HP (kW)	21.0	(15.6)	24.5	(18.3)
PTO @ Rated PTO rpm	HP (kW)	16.3	(12.2)	18.5	(13.8)
Displacement	cu. in. (cc)		61.5	(1,007.0)	
Rated Revolution	rpm		3	3,200	
Fuel Tank Capacity	gal. (<i>l</i>)		6.7	(25.5)	
DRIVE TRAIN					
Transmission			Hyd	Irostatic	
Speeds			Infinite	e, 2 Range	
Differential Lock			Rear	Standard	
Brake			Wet N	Multi Disc	
PTO Type			Inde	pendent	
Rear PTO (Standard)	rpm			540	
Mid PTO (Optional)	rpm		2	2,000	
4WD Type			Mechanica	al Engagement	
HYDRAULIC SYSTEM					
Pump			(Gear	
Pump Capacity (Max flow rate)		6.5 (24.6)	7.0 (26.4)	6.5 (24.6)	7.0 (26.4)
3-Point Hitch			Cat	tegory I	
Maximum Lift Capacity*	lb. (kg)	700 (318)			
Hydraulic Lift Control System		Position			
Steering			Hydrostatic	Power Steering	
TIRE SIZE					
Front AG. (Turf, Industrial)				0 (18×8.5-10)	
Rear AG. (Turf, Industrial)			26×12.00-12	2 (26×12.00-12)	
TRAVELING SPEEDS (Max)					
Forward	mph (kph)	0~10.3 (0~16.6)	0~9.6 (0~15.4)	0~10.3 (0~16.6)	0~9.6 (0~15.4)
Reverse	mph (kph)	0~7.0 (0~11.2)	0~6.6 (0~10.6)	0~7.0 (0~11.2)	0~6.6 (0~10.6)
DIMENSIONS					
Overall Length (incl. 3-pt hitch)	in. (mm)			(2,523.0)	I
Overall Width (min. tread)	in. (mm)	46.7 (1,185.0)	45.9 (1,168.0)	46.7 (1,185.0)	45.9 (1,168.0)
Overall Height (From Top of ROF				(2,226.0)	
Wheelbase	in. (mm)	55.1 (1,400.0)			
Min. Ground Clearance	in. (mm)	,		(162.0)	
Tread Front (AC		45.3 (1,150.0)	46.0 (1,168.0)	45.3 (1,150.0)	46.0 (1,168.0)
Rear (AG		46.7 (1,185.0)	46.0 (1,168.0)	46.7 (1,185.0)	46.0 (1,168.0)
Min. Turning Radius (With Break				2 (2.54)	
Weight with AG. Tires	lb. (kg)	1,485.0 (673.6)	1,554.0 (705.0)	1,485.0 (673.6)	1,554.0 (705.0)

NOTE: specifications and design are subject to change without notice.

- Rear PTO
- Mid PTO
- Single Lever Joystick (CS20 Series)
 Cruise Control (CS20 Series)
- Tilt Steering Wheel (CS20 Series)
- USB Port (CS20 Series)
- 12V Power Socket
- Power Steering
- Parking Brake
- PTO Shield
- Headlights
- Warning/Signal Lamps
- Cup Holder
- Horn
- SMV Sign

OPTIONAL EQUIPMENT

- Front Hydraulic Valve (CS10 Series)
- Rear Hydraulic Valve
- Rear Working Lights
- Cruise Control (CS10 Series)
- Front Weight (60 lbs)
- Side View Mirror
- Canopy Kit
- Grill Guard
- Armrest
- Front Towing Hook
- Hydraulic Filter Guard
- Rear Wheel Weight
- Field Option Cab

6300 KIOTI Drive, Wendell, NC 27591 USA Toll free 877-GO-KIOTI Fax 919-374-5001

Web www.KIOTI.com

Dealer Imprint Area

STANDARD EQUIPMENT


Daedong - USA, Inc. **KIOTI Tractor Division**







C530 SERIES EXPERIENCE UNPARALLELED COMFORT, MAXIMUM PERFORMANCE AND UNMATCHED EFFICIENCY

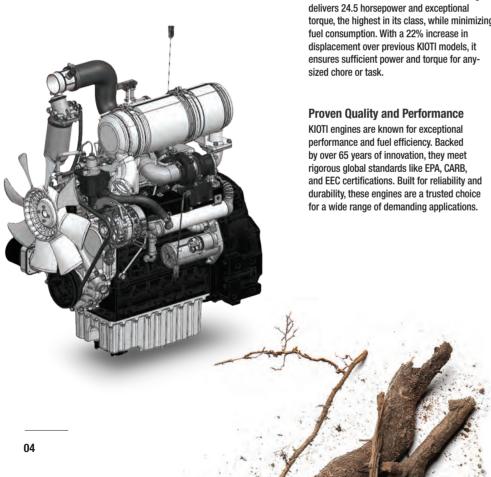


Fuel Efficient Diesel Engine

The KIOTI 1.2L 3CYL water-cooled diesel engine torque, the highest in its class, while minimizing



Mid and Rear PTO

Operate the rear and mid PTO's independently or simultaneously reducing downtime to change implements ensuring uninterrupted productivity.

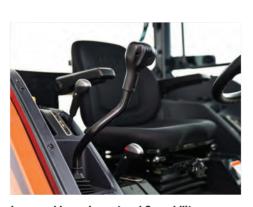

Improved Lever Layout and Operability

Enjoy improved control and comfort with an ergonomic design for a natural fit and intuitive operation. Our levers ensure precision and confidence, making your work more comfortable and efficient.



Factory Installed Cab

Enjoy unmatched comfort with a factory-installed, climatecontrolled cab featuring heat and ac, premium suspension seat, wide operator station, increased storage and reduced noise and vibration.



Four-Wheel Drive


Four-wheel drive comes standard, providing enhanced traction and stability, and is easily engaged with a simple push-pull lever, ensuring quick and effortless control over the most rugged terrain.





Twin HST Pedals

Twin HST pedals enable easy forward and reverse movement, with smooth acceleration and deceleration. The dual pedals simplify operation, reducing operator fatigue during long hours of work and repetitive tasks.



Power with Tilt Steering

Minimizes the effort required to make tight, repetitive turns. The steering wheel tilts with the simple push of a lever, allowing easy adjustment to fit the operator's needs.



Illuminated Digital Instrument Panel

The instrument panel provides critical information at a glance, including PTO engagement, vehicle information, fuel level, notifications, and alerts.



Projection Head and Working Lamps

The LED projection head and working lamps pierce the darkness, casting a wide, clear beam that illuminates your field for safe, precise maneuvering even after sunset.



Integrated Multimedia Display (Optional)

Elevate your entertainment with our multimedia display, boasting vivid audio/video and superior sound quality. Pair it with a separately purchased high-quality camera for an immersive experience, enhanced by a seamless AV multimedia deck for top-tier performance and connectivity.



Rear View Camera (Optional)

Revolutionize your workday with the rear view camera, eliminating blind spots and enhancing convenience and precision. With a clear, real-time view, operators can confidently perform three-point maneuvers and reverse with ease.



C530 SERIES BUILT WITH COMFORT IN MIND



Cruise Control

Maintain consistent speeds effortlessly with the integrated cruise control. Perfect for tasks like mowing or spraying, simply set your desired speed and let the tractor do the work, reducing fatigue and ensuring a uniform finish.



HVAC Climate Control

Our advanced HVAC system provides optimized heating and cooling, ensuring a comfortable cabin year-round. Enjoy reliable cooling in summer and warmth in winter. Engineered for efficiency and durability, this system enhances operator comfort and productivity.



Deluxe Suspension Seat

The Deluxe Suspension Seat is engineered to deliver comfort for the operator by absorbing shocks and vibrations, minimizing the impact of rough surfaces and ensuring a smooth ride.



Swivel Seat for Backhoe Operation (Optional)

The swivel feature allows the operator to rotate the seat towards the rear of the tractor, facilitating in-cab operation of the backhoe when installed.



Drive-Over Deck

Offers a seamless and efficient mounting experience, allowing you to easily mount the mid mower by simply driving over it. This innovative design streamlines setup, eliminating side insertion and getting you to work faster with minimal effort.



Front and Rear Wipers

Standard front double arm wiper (optional rear single arm wiper) keeps your view crystal clear, battling both rain and dust. Their optimized placement ensures the operator's vantage point stays clean and uncompromised.



Electric / Hydraulic Thumb (Optional)

Designed for ease of use, this feature allows for precise and responsive control of the hydraulic thumb directly through the joystick, allowing you to accomplish more in less time.



Rear Differential Lock

The lever easily engages the differential, ensuring optimal traction in slippery conditions like uneven or muddy terrain.









KIOTI Connect Capable

KIOTI Connect is an intuitive app that provides real-time insights, maintenance tracking, and remote diagnostics, keeping you connected to your machine like never before.



USB Charging Port with AUX / Stereo

Stay connected and entertained with the built-in USB charging port and AUX/stereo system. Connect your phone to the cabin speakers via AUX, or upgrade to optional Bluetooth stereo or audio den for enhanced music and streaming capabilities.



Rubber Floor Mats

Rubber floor mats are designed to protect the base of your tractor from dents and scratches, ensuring long-lasting durability. Additionally, these mats are easy to clean, allowing for quick removal of dirt and debris.



Class-Leading Torque

Boasting an impressive 51.63 lb.-ft of torque, it is the highest-torque tractor in its class. This exceptional power output is provided by its robust 1.2L KIOTI diesel engine, which produces 24.5 horsepower. Tackle tasks with ease, from mowing and tilling to landscaping and hauling.



Standard Quick Attach

The Quick Attach feature makes switching tasks easy, with minimal effort and maximum convenience. Left and right levers allow you to effortlessly install and remove attachments from the loader quickly & efficiently.



Self-Leveling Loader (Optional)

Maintains the desired bucket angle when lifting and lowering, preventing the need to manually position the bucket throughout the lift/lower cycle to keep your material in the bucket. This can increase productivity while adding a layer of safety to your worksite.



In-Cab Loader Attachment Access

Enjoy the convenience and safety of managing the loader quick release from the comfort of the cab, eliminating the need to repeatedly get on and off the tractor.



Backhoe Compatible Cabin

Allows for smooth transitions between driving and digging, with a removable rear glass and back panel, quickly transition from tractor to backhoe operations for instant access to controls. This design minimizes downtime and maximizes productivity.



ATTACHMENTS

BACKHOE SPECIFICATIONS

MODEL		SB2530
Bucket Sizes	in. (mm)	8 (203.2) 12 (304.8) 16 (406.4)
Digging Depth (Two Foot Flat Bottom)	in. (mm)	72.4 (1,840)
Reach from Center Line of Swing Pivot	in. (mm)	105 (2,668)
Loading Height (Bucket at 60°)	in. (mm)	59.4 (1,510)
Maximum Leveling Angle	deg.	8
Swing Arc	deg.	150
Transport Height (Maximum)	in. (mm)	68.5 (1,739)
Transport Overhang	in. (mm)	41.3 (1,050)
Bucket Rotation	deg.	165
Stabilizer Spread (Down Position)	in. (mm)	78 (1,981)
Stabilizer Spread (Up Position)	in. (mm)	54 (1,372)
Angle of Departure	deg.	17
Shipping Weight (Without Bucket)	lbs. (Kgf)	613 (278)
Bucket Digging Force	lbs. (Kgf)	2,105 (955)
Dipperstick Digging Force	lbs. (Kgf)	1,184 (537)
Operating Pressure	psi (bar)	1,886 (130)

FRONT END LOADER SPECIFICATIONS

MODEL		SL2530 (Non-Self Leveling)	SL2530 (Self Leveling*)
Maximum Lift Height (to Pivot Point)	in. (mm)	70.9 (1,800)	71.1 (1,807)
Clearance w/Bucket Dumped (@ 45°)	in. (mm)	50.4 (1,280.2)	51.6 (1,310)
Reach at Maximum Height	in. (mm)	28.3 (718)	27.4 (695)
Reach w/Bucket on Ground	in. (mm)	54.2 (1,377)	54.4 (1,382)
Maximum Rollback Angle	deg.	27	42
Diggiging Depth Below Grade	in. (mm)	8.1 (205)	7.5 (190)
Overal Height (in Carry Position)	in. (mm)	43.4 (875)	37.4 (905)
Depth of Bucket (to Back of Inner Shell)	in. (mm)	17 (432)	17 (432)
Height of Bucket	in. (mm)	18.6 (473)	18.6 (473)
Length of Bucket (to Pivot Pin)	in. (mm)	22 (559)	22 (559)
Lift Capacity to Full Height (at Pivot Pins)	lbs. (kg)	871 (395)	913 (414)
Breakout Force (at Pivot Pins)	lbs. (kg)	1,299 (589)	1,281 (581)
Relief Setting (Loader Control Valve)	psi (Kgf)	1,849 ~ 1,920 (130 ~ 135)	1,849 ~ 1,920 (130 ~ 135)
Bucket Size (QA)	in. (mm)	48 (1219.2)	48 (1219.2)
Bucket Capacity (Heaped)	ft.3 (m3)	6.70 (0.19)	6.70 (0.19)

^{*}Mechanical self leveling (optional).

MID-MOUNT MOWER SPECIFICATIONS

MODEL		SM2554	SM2560
Mounting Method		Suspended Linkage	Suspended Linkage
Adjustment of Cutting Height		7 Step (0.5"/ Step)	7 Step (0.5"/ Step)
Cutting Width	in. (mm)	54 (1,368)	60 (1,524)
Cutting Height	in. (mm)	1 - 4 (25.4 - 101.6)	1 - 4 (25.4 - 101.6)
Weight	lbs. (kg)	249 (113)	254.0 (115.2)
Deck Thickness	in. (mm)	0.1 (3.2)	0.1 (3.2)
Blade Spindle Speed	rpm	2,805	2,805
Blade Tip Velocity	m/s	69.2	75.2
Blade Length	in. (mm)	18.5 (470)	20.4 (517)
Number of Blades		3	3
Total Length	in. (mm)	35.7 (908)	37.9 (962)
Total Width	in. (mm)	69.3 (1,760)	73.4 (1,865)
Total Height	in. (mm)	10.5 (267)	10.7 (273)
Auto Connector Link KIT	in. (mm)	N/A	Opt
Auto Joint KIT	in. (mm)	N/A	Opt

^{*} Specifications and design are subject to change without notice.

SPECIFICATIONS

MODEL	CS2530C	
ENGINE		
Model	KIOTI 3L123	
Туре	KIOTI 3 Cylinder, Water-Cooled Diesel	
Engine Gross	24.50 HP (18.27 kW)	
PTO	19.30 HP (14.32 kW)	
Displacement	75.24 cu.in. (1,233 cc)	
Rated Revolution	3,000 rpm	
Fuel Tank Capacity	6.6 gal. (25.5 ℓ)	
DRIVE TRAIN		
Transmission	2 Range Hydrostatic	
Speeds	Infinite	
Differential Lock	Rear Standard	
Brake	Wet Disc	
PTO	Electric / Hydraulic	
Rear PTO	540	
4WD Type	Mechanical	
HYDRAULIC SYSTEM		
Pump	Open Center	
Pump Capacity (max flow rate)	Steering 2.03 GPM (7.7 lpm) / lmp. 4.9 GPM (18.7 lpm)	
3-Point Hitch	Category I	
Maximum Lifting Capacity*	700 lbs. (317.52 kg)	
Hydraulic Lift Control System	Mechanical	
No. of Standard Remote Valves (Rear)	1 (Optional)	
Tire Size		
Front AG.	18 x 8.5 -10	
Rear AG.	26 x 12 - 12	
TRAVEL SPEED		
Forward	0 ~ 8.99 mph (0 ~ 14.47 kph)	
Reverse	0 ~ 6.15 mph (0 ~ 9.90 kph)	
DIMENSIONS	Γ \ Γ /	
Overall Length w/o front weight & w/ 3-pt hitch	102.90 in.(2,613.70 mm)	
Overal Width (min. tread)	48.30 in. (1,226.82 mm)	
Overall Height	82.60 in.(2,098.04 mm)	
Wheelbase	55.10 in.(1,399.54 mm)	

^{*@ 24&}quot; aft of hitch.

NOTE: Specifications and design are subject to change without notice.

STANDARD EQUIPMENT

- Power Steering
- Tilt Steering
- Rear Differential Lock
- Rear PTO
- Mid PTO
- Wet Multi Disc Brakes
- HVAC
- Joystick Valve
- 4 Wheel Drive
- Cruise Control
- PTO Shield
- SMV Sign
- Parking Brake
- Headlights

• 7 Pin Socket • Beacon Light Bluetooth Radio • LCD Monitor • 3rd Funtion • Front Grille Guard • Rear Window Wiper • Rear Work Lights • Hydraulic Filter Guard • Towing Hook • Back Up Camera • Rear Hydraulic Valve • Front Weight

- Warning / Signal Lamps
- 12V Power Outlet & USB Socket
- Suspension Seat with Arm Rests

OPTIONAL EQUIPMENT

- KIOTI Connect Capable
- Horn
- Fixed Drawbar
- Cup Holder
- Side View Mirrors
- Rear View Mirror
- Front Wiper
- Sun Visor
- Front Work Lights
- Rear Window Defrost
- Rear Wheel Weights

Dealer Imprint Area

Daedong - USA, Inc. **KIOTI Tractor Division** 6300 KIOTI Drive, Wendell, NC 27591 USA Toll free 877-GO-KIOTI Fax 919-374-5001 Web www.KIOTI.com