



# ZERO-TURN MOWERS



# ZXR / ZXC SERIES

## Residential & Commercial Zero Turn Mowers

Whether you're cultivating your backyard haven or taming diverse landscapes, our durable design, plush comfort, and uncompromising performance empower you to transform any terrain.

**Hydro Gear® Transaxles**

**Large Fuel Capacity**

**Ergonomic Controls**

**Comfort Suspension Seating**

**48", 54", & 60" Cutting Widths**

**Dual Plate 10-Gauge Steel Deck**

**7-Gauge at Deck Edge Area**

**Excellent Cut Quality**







# PREMIUM RESIDENTIAL MODELS

ZXR48  
ZXR54  
ZXR60



## Heavy Duty Chassis

Robust frame with strong tubular steel and foldable ROPS to protect operators.



## Rear Guard

Steel rear guard to protect major components with convenient integrated tie-downs.



## LED Headlights

Standard LED headlights to improve visibility in low light conditions.



## Operator Platform with Access Panel

Wide platform with tool-free access door is designed for operator comfort and convenience, while allowing for easy service and cleaning.



## Dial-Type Adjustable Deck System

Ergonomically designed and simple to use adjustable deck system allows for precise cutting heights.



## Digital Control Panel / Keyless Start

Easy to use push button keyless start and diagnostics panel comes with standard 12V charging adapter.



## Engines

Models equipped with the following engines: Briggs & Stratton CXI Series 44T9, Kohler CONFIDANT ZT740, or Kawasaki FT691V.



## Adjustable Suspension Seat

Standard 1.5" plush high-back suspension seat for operator comfort.



## Heavy Gauge Fabricated Deck

Dual plate 10-gauge fabricated deck in 48", 54", and 60" sizes with reinforced 7-gauge edge for long lasting durability.



# HEAVY-DUTY COMMERCIAL MODELS

ZXC48  
ZXC54  
ZXC60




## Integrated High Capacity Fuel Tanks

The large twin fuel tanks with 12.5 gallon total capacity will keep you mowing with less downtime for refueling.



## Rear Guard

Steel rear guard to protect major components with convenient integrated tie-downs.

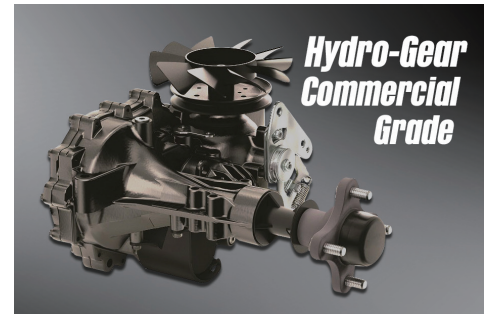

## Commercial-Grade Transaxles

Mowers use Hydro-Gear commercial-grade transaxles for smooth, durable and reliable operation.



## Operator Platform with Access Panel

Wide platform with tool-free access door is designed for operator comfort and convenience, while allowing for easy service and cleaning.



## Dial-Type Adjustable Deck System

Ergonomically designed and simple to use adjustable deck system allows for precise cutting heights.




## Digital Control Panel / Keyless Start

Easy to use push button keyless start and diagnostics panel comes with standard 12V charging adapter.



## Engines

Models equipped with the following engines: Briggs & Stratton CXi Series 49T8, Kohler Command PRO CV742, or Kawasaki FT730V.

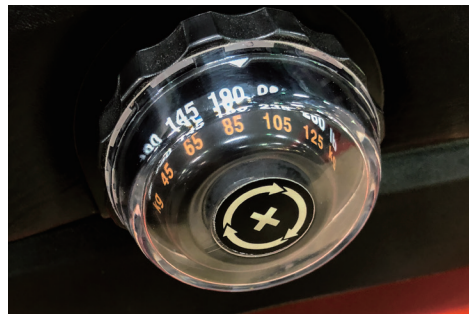

## Premium Adjustable Seat Suspension

Standard 3" plush high-back adjustable suspension seat provides maximum comfort for each operator.



## Heavy Gauge Fabricated Deck

Dual plate 10-gauge fabricated deck in 48", 54" and 60" sizes with reinforced 7-gauge edge for long lasting durability.

# SPECIFICATIONS

MODEL	ZXR48	ZXR54	ZXR60	ZXC48	ZXC54	ZXC60
Type		Premium Residential (Engine choice with each deck size)			Premium Commercial (Engine choice with each deck size)	
<b>ENGINE</b> (Available for all models)	<b>Briggs &amp; Stratton</b>	<b>Kohler</b>	<b>Kawasaki</b>	<b>Briggs &amp; Stratton</b>	<b>Kohler</b>	<b>Kawasaki</b>
Type	CKI Series Engine 44T977	COMMAND ZT740	FT691V	CKI Series Engine 49T8	COMMAND PRO CV742	FT730V
Engine Gross	25 (18.64)	25 (18.64)	22 (16.4)	27 (20.12)	25 (18.64)	24 (17.9)
Displacement	44.2 (724)	45.6 (747)	44.3 (726)	49.4 (810)	45.6 (747)	44.3 (726)
Choke		Manual Lever			Manual Lever	
Fuel Capacity	US gal. (ℓ)	7.5 (28.4) (1 Tank on Left Side)			12.5 (47.3) (2 Tanks: Left and Right Side)	
Fuel Requirement			Unleaded Gasoline (87 Octane or higher)			
<b>DRIVE TRAIN</b>						
Model		Hydro Gear ZT-3200			Hydro Gear ZT-3400	
Displacement (Pump/Motor)		10/16			12/16	
<b>PTO TYPE</b>						
Clutch	ft/lb (Nm)	125 (170)			200 (271)	
<b>TIRE SIZE</b>						
Front		13x6-6		13x6-5-6	13x6-5-6	
Rear		23x9-5-12		23x9-5-12	23x10-5-12	
<b>TRAVELING SPEEDS</b>						
Forward	mph (km/h)	9 (14.5)			10 (16)	
Parking Brake			Internal Integrated in Axle			
<b>DIMENSIONS</b>						
Overall Length	In. (mm)	80.7 (2,050)		81.7 (2,075.2)	80.7 (2,050)	81.7 (2,075.2)
Overall Width (Chute Down)	In. (mm)	60.7 (1,541.8)		72.6 (1,844)	60.7 (1,541.8)	72.6 (1,844)
Overall Height (ROPS Upright)	In. (mm)			71.5 (1,816.1)		
Wheelbase	In. (mm)	48.5 (1,231.9)		49.5 (1,257.3)	48.5 (1,231.9)	49.5 (1,257.3)
Width (Tire to Tire)	In. (mm)		50.3 (1,277.62)			51.3 (1,303.02)
Approximate Curb Weight	Lb. (kg)	1,033 (468.6)	1,052 (477.2)	1,075 (487.6)	1,033 (468.6)	1,052 (477.2)
<b>MOWER DECK</b>						
Mower Deck Type			Fabricated			
Lift Mechanism			Foot Pedal			
Deck Steel Thickness				Dual Plate 10-gauge with 7-gauge at edge area		
Anti-Scalp Ball Rollers		5 (4 front, 1 rear)	6 (4 front, 2 rear)	8 (4 front, 4 rear)	5 (4 front, 1 rear)	6 (4 front, 2 rear)
Cutting Width of Mower	In. (mm)	48 (1,219.2)	54 (1,371.6)	60 (1,524)	48 (1,219.2)	54 (1,371.6)
Blades				3 Notched (Optional Mulching)		
Cutting Height	In. (mm)			1.5-5 (38.1-127)		
Discharge Chute				Side (Molded Rubber)		
Deck Height Adjustment				Dial Type		
<b>SEAT</b>						
Suspension		1.5" Suspension				3" Suspension
Sliding Adjustment				Standard		
Arm Rest & Seat Belt				Standard		
<b>STANDARD EQUIPMENT</b>						
Foldable ROPS				Standard		Standard
Head Light				Standard		Standard
Tow Hitch				Standard		Standard

\* NOTE: Specifications and design are subject to change without notice. Not available for sale in California.



**KIOTI Tractor Division**  
DAEDONG - USA, INC.  
6300 KIOTI Drive, Wendell, NC 27591 USA

Toll free 877-60-KIOTI • Fax 919-374-5001  
Web www.KIOTI.com



## OPTIONAL EQUIPMENT

- Mulching Kit
- Work Lamp Kit
- PECO Bagger (awmvac.com)

LIT-ZTR-ALL2