



ZXS Series

Stand-On ZTR MOWERS



ZXS SERIES

Stand-On ZTR

Designed with ergonomics and serviceability in mind, KIOTI ZXS Stand-on Mowers tackle your toughest turf with comfort and ease.

Ergonomic Controls
Spring Suspension Platform
Adjustable Dampers

48", 54" Cutting Widths
Large Fuel Capacity
Excellent Cut Quality



COMMERCIAL GRADE

ZXS48
ZXS54



Operator Controls

The ZXS stand-on controls include a key start, choke, throttle control, single pull deck lift, and adjustable dampers so landscapers can fine tune the controls to their desired feel and response. The front stationary bar is adjustable to reduce hand strain, or to make it easier for smaller hands to operate. Also, this adjustable bar can be easily setup to reduce speed for new users as well as increase speed for those who are more experienced.



Spring Suspension Operator Platform

Platform is suspended for comfort but can also be stowed away allowing the operator to walk-behind the mower for tight or confined areas.



Spacious Center Tower

Center tower located behind plush operator pad is spacious to allow plenty of room for maintenance and service.




Large Fuel Tank

Large 7-gallon fuel tank allows for extended mowing, preventing downtime on the job due to refueling.



Kawasaki Engine

The KIOTI ZXS Series is equipped with a Kawasaki FT730V 2-Cylinder 90° V-twin internally vented carburetor engine delivering 24 HP.

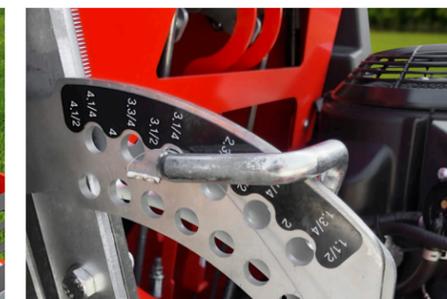

Intuitive Deck Lift

Deck lift with locking pin height adjustment is also equipped with a single-pull handle to enable self-locking transport mode with push button release.



Heavy Gauge Fabricated Deck

10-gauge fabricated deck in 48" & 54" sizes with reinforced 7-gauge edge for long lasting durability.



OHSAS 18001
NO:K033008

SPECIFICATIONS

MODEL		ZXS48	ZXS54
ENGINE			
Model		Kawasaki FT730V	
Type		2-Cylinder 90° V-twin Internally vented carburetor	
Engine Gross	hp (KW)	24 (17.9)	
Displacement	cu. in. (cc)	44.3 cu. in. (726 cc)	
Choke		Manual Lever	
Fuel Tank Capacity	US gal. (ℓ)	7 gal. (26.4 ℓ)	
Fuel Requirement		Unleaded Gasoline (87 Octane or higher)	
DRIVE TRAIN			
Model		Hydro-Gear ZT-3400	
Displacement Pump/Motor		12 cc/16 cc	
TRAVELING SPEEDS			
Forward	mph (km/h)	10.5 (17.7)	
Reverse	mph (km/h)	3.5 (5.6)	
PTO Type			
Clutch	lb./ft. (kgf./m)	200 (27.6)	
DIMENSIONS / CAPACITY			
Overall Length	in. (mm)	65 (1,650)	65 (1,650)
Overall Width	in. (mm)	60.6 (1,540)	68.5 (1,740)
Overall Height	in. (mm)	51.2 in. (1,300)	51.2 (1,300)
Approximate Curb Weight	lb. (kg)	992 (450)	1,014 (460)
TIRE SIZE			
Front	Turf	13x5-6	
Rear	Turf	23x10.5-12	
MOWER DECK			
Mower Deck Type		Fabricated	
Lift Mechanism		Hand Lever with Push Button Transport Release	
Deck Steel Thickness		10-gauge with 7-gauge at edge area	
Anti-Scalp Ball Rollers		6 (4 front, 2 rear)	6 (4 front, 2 rear)
Cutting Width of Mower	in. (mm)	48 (1,219)	54 (1,371.6)
Blades		Notched	
Cutting Height	in. (mm)	1.5-4.5 (38.1-114.3)	
Discharge Chute		Molded Rubber	
Deck Height Adjustment		Pin	

* NOTE : Specifications and design are subject to change without notice. Images shown may vary from actual product.




KIOTI Tractor Division

DAEDONG - USA, INC.

6300 KIOTI Drive, Wendell, NC 27591 USA

Toll free 877-GO-KIOTI • Fax 919-374-5001

Web www.KIOTI.com

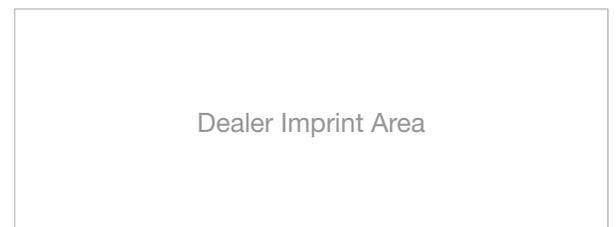

Dealer Imprint Area